


# LC-P123R4P

For standby power supplies.  
Expected trickle design life: 10 – 12 years at 20 °C according to Eurobat.




## Dimensions (mm)

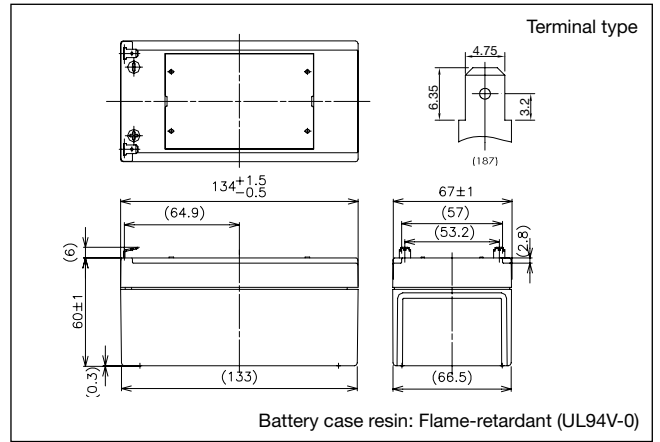

## Specifications

Nominal voltage	12 V	
Nominal capacity (20 hour rate)	3.4 Ah	
Dimensions	Length	134 mm
	Width	67 mm
	Height	60 mm
	Total Height	66 mm
Approx. mass	1.2 kg	
Terminal	Faston 187	

## Duration of discharge vs Discharge current

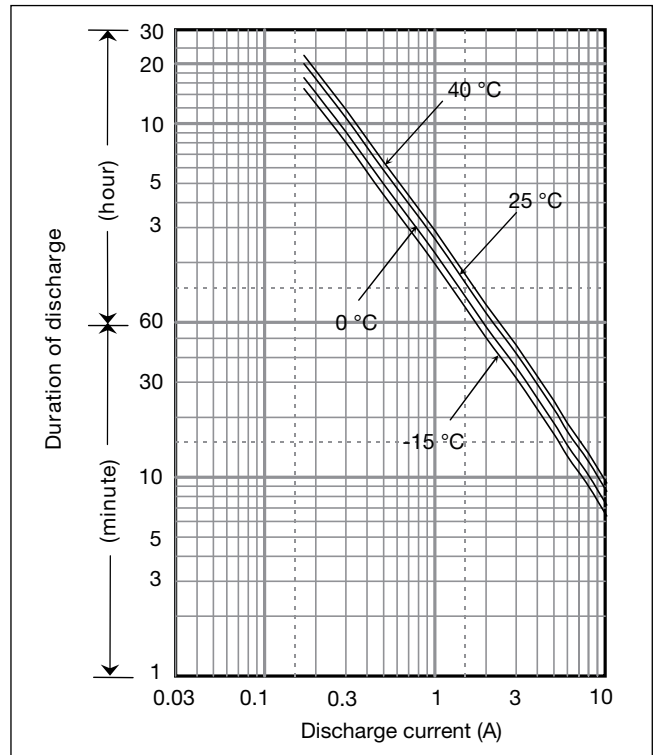

## Characteristics

Capacity (25 °C)	20 hour rate	3.4 Ah
	10 hour rate	3.0 Ah
	5 hour rate	2.7 Ah
	1 hour rate	2.1 Ah
Internal resistance	Fully charged battery (25 °C)	60 mΩ
Temperature dependency of capacity (20 hour rate)	40 °C	102 %
	25 °C	100 %
	0 °C	85 %
	-15 °C	65 %
Self discharge (25 °C)	After 3 months	91 %
	After 6 months	82 %
	After 12 months	64 %

## Watt Table

(Wattage/Battery)

Cut-off V	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
9.6V	204	161	105	80.4	67.4	50.3	35.5	28.4	19.6	15.0	11.3	8.63	7.13	5.80	3.81	2.06	1.72
9.9V	190	151	103	79.8	66.3	49.7	35.3	28.4	19.2	14.9	11.2	8.58	7.07	5.78	3.80	2.05	1.71
10.2V	175	142	100	78.2	65.2	49.2	34.9	27.8	18.8	14.5	11.1	8.52	7.01	5.73	3.76	2.05	1.71
10.5V	155	127	93	72.8	61.9	48.1	34.4	27.3	18.4	14.0	11.0	8.46	6.96	5.66	3.74	2.04	1.70
10.8V	131	112	83	67.9	60.3	46.4	33.8	26.7	17.8	13.4	10.7	8.46	6.79	5.66	3.68	1.98	1.70

## Ampere Table

(Ampere/Battery)

Cut-off V	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
9.6V	18.4	14.4	9.40	6.99	5.81	4.30	3.02	2.41	1.66	1.26	0.949	0.722	0.595	0.484	0.318	0.171	0.143
9.9V	17.0	13.6	9.21	6.94	5.71	4.25	3.00	2.41	1.62	1.26	0.945	0.718	0.590	0.482	0.316	0.171	0.143
10.2V	15.7	12.7	8.97	6.80	5.62	4.20	2.97	2.36	1.59	1.22	0.935	0.713	0.586	0.478	0.313	0.170	0.142
10.5V	14.0	11.4	8.31	6.33	5.34	4.11	2.93	2.31	1.56	1.18	0.921	0.708	0.581	0.472	0.312	0.170	0.142
10.8V	11.8	10.1	7.41	5.90	5.19	3.97	2.88	2.27	1.51	1.13	0.897	0.708	0.567	0.472	0.307	0.165	0.142


**Charging Method**

Trickle Use	Control voltage: 13.6 - 13.8 V; Initial current: 0.51 A or smaller
-------------	---


**Cut off voltage**

Discharge current	0.17 A - 0.68 A	0.68 A - 1.7 A	1.7 A - 3.4 A	3.4 A - 6.8 A	6.8 A - 10.2 A
Cut off voltage (V)	10.5	10.2	9.9	9.3	8.7


**Influence of Temperature on Trickle life**

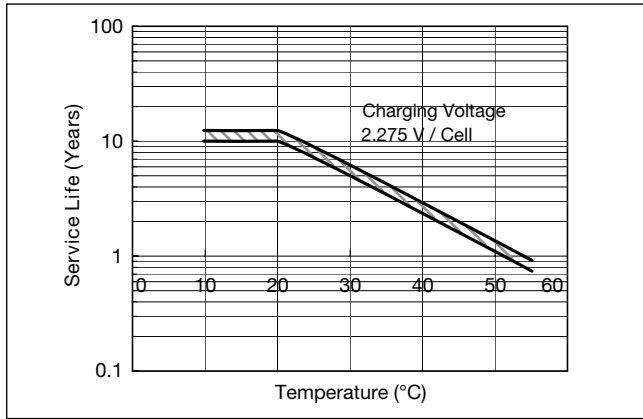


**Residual capacity vs storage period**

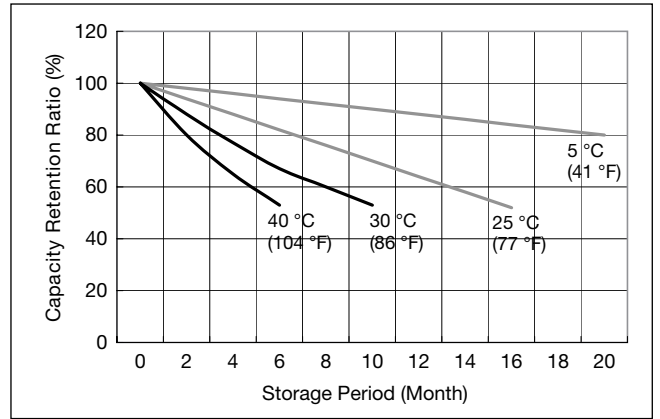

**Constant-voltage and constant-current charge characteristics for Trickle use**

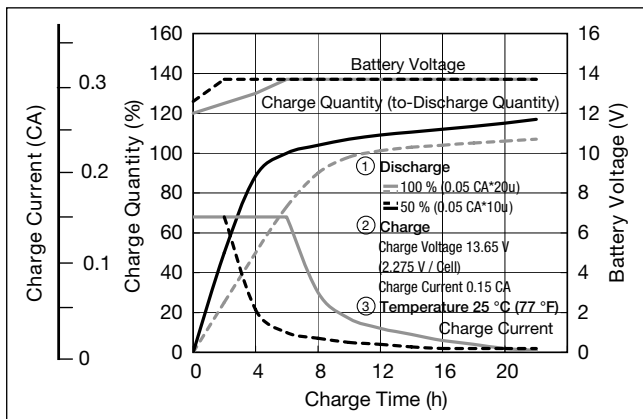

**Discharge capacity by temperature and by discharge current**

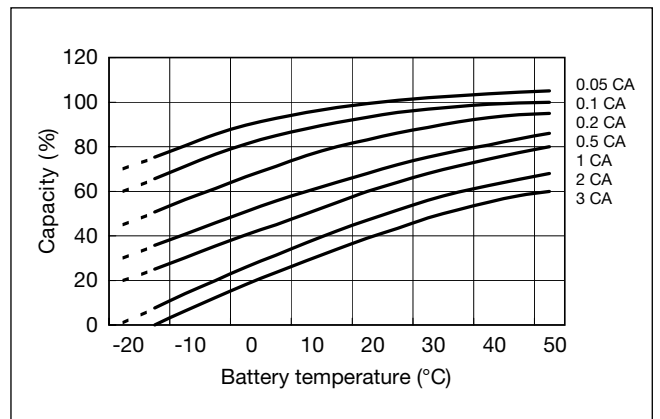

**Discharge characteristics**

